



POWER SWITCH FOR STORAGE DC 4.0 | 6.0 | 8.0 | 10.0

SAFE SUPPLY OF HOUSEHOLD
AND FUNCTIONAL RELIABILITY
OF PV SYSTEM IN CASE OF
GRID FAILURE

BACKUP POWER SUPPLY

- Provision of backup grid
- 3-phase supply
- Separated output for not backed up loads


EASY INSTALLATION

- Compact and lightweight housing
- Power Sensor included
- Wall mounting
- Upgradeable

EFFICIENT

- Up to 6 kVA in single or 3-phase mode for Storage DC 4.0 and 6.0
- Up to 3 x 3,3 kVA in 3-phase backup mode for Storage DC 8.0 and 10.0
- Fast switching

SYSTEM OVERVIEW

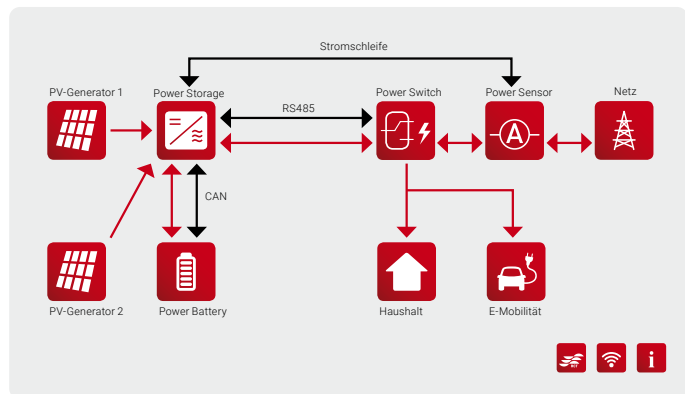

Power Switch**63/25****63/25-3**

Order number

ZSW064N1AE5

ZSW064N3AE5

POWER DATA

Nominal voltage	230/400 VAC	
Nominal frequency	50 Hz	
Max. prospective short circuit current	10 kA	
Max. grid-side fuse	63 A	
Max. thermal throughput power (3AC) P_{NOM}	30 kW ($T_a = 25^\circ$) / 20 kW ($T_a = 40^\circ$)	
Losses in standby-mode	app. 18 W	
Additional operating losses at 25/50/100% of P_{NOM}	app. 2/4/8	
Allowed Battery inverters	RCT Power Storage DC 4.0 / 6.0 / 8.0 / 10.0	
Disconnection from the grid	4-pole	3-pole
Permitted grid form	TN-C-S/TN-S/TT	TN-C-S/TN-S
Fuse connection RCT Power Storage	C25	
Terminals Meter/Load/Backup load	Spring clamps up to 16mm ²	
Terminals Power Storage	Spring clamps up to 6mm ²	

OTHERS

Operating temperature range	-5°C... +40 °C
Relative humidity	5... 95 %
Mounting method	Wall mounting
Dimensions (height x width x depth)	446 x 622 x 161 mm
Weight app.	15 kg

SAFETY/ STANDARDS

Safety class	II
IP-class	65
Standards	IEC/EN61439-1 (DE: VDE 0660-600-1) IEC/EN61439-2 (DE: VDE 0660-600-2) IEC/EN61439-3 (DE: VDE 0660-600-3)
Warranty	2 years